



# OmniPAGE Isoelectric Focusing

Equipped with rehydration and focusing trays, the Cleaver Scientific IEF system has been optimised to perform first-dimension isoelectric focusing (IEF) with IPG (immobilised pH gradient) strips quickly, easily and reproducibly. It can also be used with precast IEF Gels.

An ideal entry-level system for both experienced and occasional IEF users, the unit is versatile enough to meet the needs of laboratories with increased throughput requirements as well as first time users.

## HIGH CAPACITY


Its high-capacity focusing tray accommodates up to twelve IPG strips. Adjustable 'pick-and-place' electrodes clip conveniently anywhere within the focusing tray to resolve IPG strips 7-24cm in length and are colour-coded to prevent polarity reversal. The Electrode frame clips directly on to the cooling plate and includes adjustable electrodes to run horizontal precast IEF and PAGE gels.

A cooling plate, manufactured from a special grade ceramic in a large 26x26cm surface area, facilitates effective heat dissipation and control, particularly during high voltage IEF techniques. An optional, but recommended, recirculating chiller connects quickly and easily to the cooling plate to maintain optimal operating temperatures for IPG strips and precast gels.

## REHYDRATION

The Rehydration tray allows convenient transfer of IPG strips to the focusing tray without time-consuming removal of residual rehydration buffer and also enables the focusing tray to remain permanently in use for IEF to maximise throughput and provides useful storage at -20°C for focused strips before second-dimension runs.


For those requiring a power supply, the Consort EV2320, 3000V, 150mA, 150W enables desired Volt-hours for focusing to be attained faster at maximum voltage.

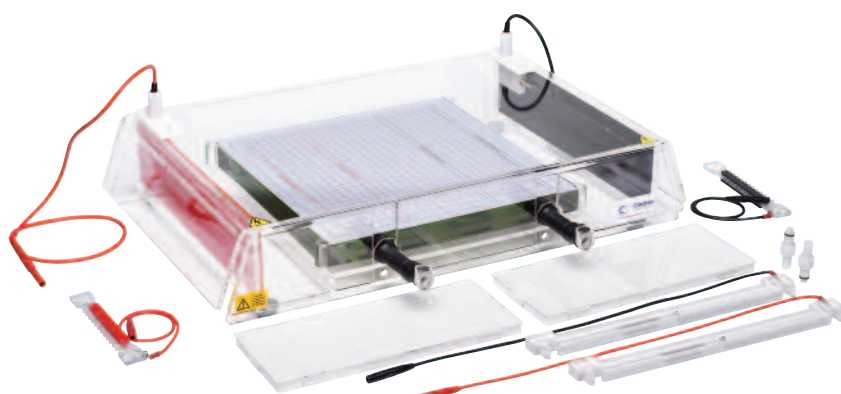


## KEY FEATURES

- For IPG strips and IEF gels
- Large cooling platform area
- 'Pick-and-Place' adjustable electrodes
- Focusing tray for a maximum twelve IPG strips
- Rehydration tray also included


## IEF COMPONENTS

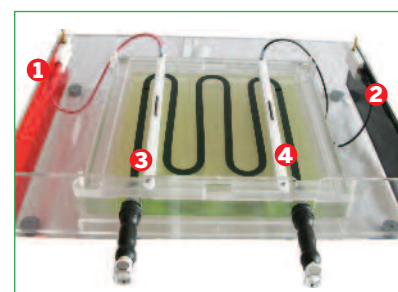

1. Positive Electrode, CSL-IEFPOS  
2. Negative Electrode, CSL-IEFNEG  
3. Spring Positive Electrode, CSL-SGELEPOS  
4. Spring Negative Electrode, CSL-SGELENEG

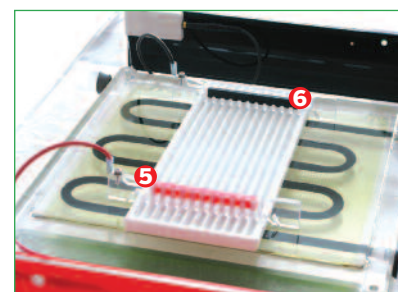

5. Focusing Tray Adjustable Electrode Negative, CSL-FTELECNEG  
6. Focusing Tray Adjustable Electrode Positive, CSL-FTELECP

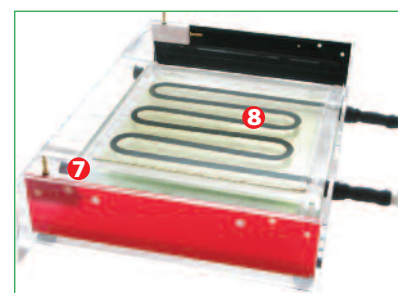

7. Replacement IEF Tank, CSL-IEFTANK (Tank/Electrode Only, No Cooling Platform)  
8. Cooling Platform for IEF system, CSL-IEFCP

Tray Specifications	IPG Strip Length			
	7cm	11cm	18cm	24cm
<b>Focusing Tray</b>				
Electrode Distance	6.5cm	10.2cm	17.1cm	22.7cm
IPG Strip Length	7cm	n/a	18cm	24cm
<b>Rehydration Tray</b>				
Recommended Volume for Strip Rehydration	3.5ml	6ml	8.0ml	12.0ml

## ORDERING INFORMATION

CSL-IEF	Flatbed IEF system for IPG strips and gels, with focusing and rehydration trays		
CSL-CHILLER*	Chiller system, -20 to 100°C, See page 50 for full technical specification	CSL-IEFCP	Cooling Platform for IEF system
CSL-IEF-KIT*	1-D Combination Package, includes CSL-IEF, CSL-CHILLER and EV2320	CSL-IEFTANK	Replacement IEF Tank (Tank/Electrode Only, No Cooling Platform)
CSL-IEFPOS	Replacement positive electrode (Fits to Tank side)	IEF-LID	Lid for CSL-IEF (no cables)
CSL-IEFNEG	Replacement negative electrode (Fits to Tank side)	CSL-IEFFRME	Replacement electrode frame
CSL-SGELEPOS	Replacement Spring Positive Electrode	CSL-RHYDTRY	Rehydration Tray
CSL-SGELENEG	Replacement Spring Negative Electrode	CSL-FOCUSTRAY	Focusing Tray with adjustable electrodes
CSL-FTELECP	Focusing Tray Adjustable Electrode Positive	EV2320	Consort 3000V, 300mA, 300W power supply
CSL-FTELECNEG	Focusing Tray Adjustable Electrode Negative		

\* For 110V units add \$ to the order code